

The body of motor and pump is made of rigid cast iron for long-lasting durability.
Greatly increased maximum submersion depth due to mechanical seal resistant to high pressure.
Semi-open impeller made of high chrome alloy match with wear plate(ductile iron) achieves superior durability.
Effective motor cooling due to discharge channel cast as part of the motor housing.Space economically by a top outlet.
Discharge 50mm(2")to 150mm(6"),motor 1.5kW(2HP) to 15kW (20HP).
Hermetically sealed motor equipped build-in thermal protection for the power below 15kW.



Specification



- Capacity:up to 160m³/h
- Head:up to 57 meters
- Power:1.5kW(2HP) to 15kW(20HP)
Power supply:three phase 400V ± 10%, 50Hz
380V ± 10%, 60Hz
- Insulation class:F
- Protection class:IP68
- Cable length:8m
- Water temperature:up to 40°C
- Max.water depth:25m

Application

- Civil engineering
- Mines,quarries,coal ore & slurries
- Sewage treatment plants
- General pumping purposes

Special features on request

- Other voltages
- The length of cable is optional

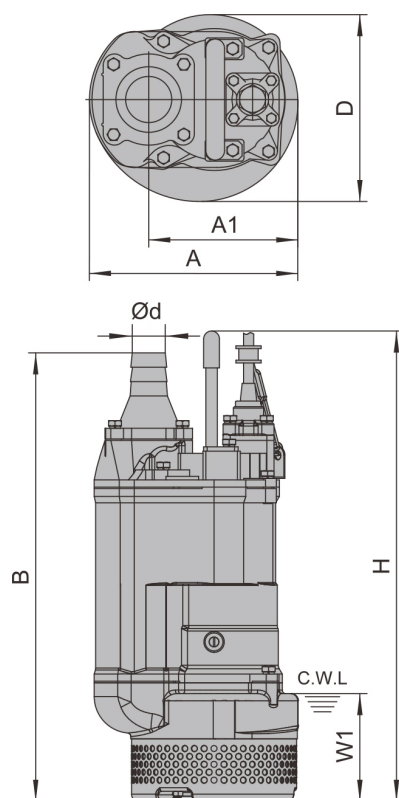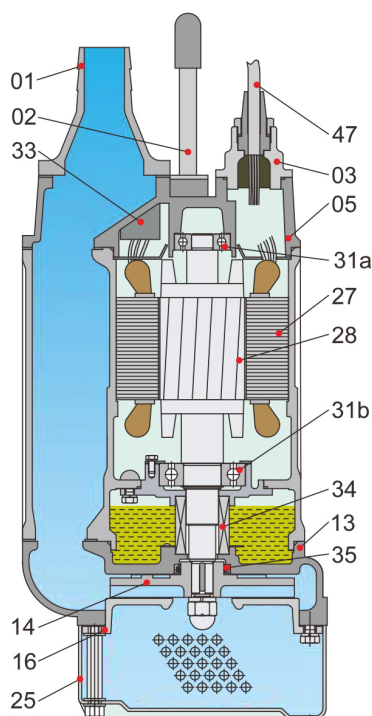

W1:Continuous running water level



Material of construction

Item No.	Part name	Material	Item No.	Part name	Material
01	Hose coupling	Cast iron	28	Rotor	Shaft:AISI420SS
02	Handle	Rubber&steel	31a	Bearing	Ball bearing
05	Upper cover	Cast iron	31b	Bearing	Ball bearing
11	Motor body	Cast iron	33	Motor protector	
13	Pump body	Cast iron	34	Mechanical seal	Sic-Sic/Carbon-Sic(≤ 2.2kW) Sic-Sic/Sic-Sic(≥ 3.7kW)
14	Impeller	High chrome alloy	35	Oil seal	
16	Inlet plate	Ductile iron	47	Cable	
25	Strainer	Steel			
27	Stator				

Dimensions & weights

Model (50/60Hz)	d mm	A mm	A1 mm	B mm	D mm	H mm	W1 mm	N.W Kg	G.W Kg	Packing dimension mm
KTZ21.5	50	235	173	535	216	505	120	36	40	610x265x265
KTZ31.5	80	235	173	535	216	505	120	36	40	610x265x265
KTZ22.2	50	235	173	535	216	505	120	39	43	610x265x265
KTZ32.2	80	235	173	535	216	505	120	39	43	610x265x265
KTZ23.7	50	283	208	628	252	629	150	63	68	710x320x295
KTZ33.7	80	283	208	628	252	629	150	63	68	710x320x295
KTZ43.7	100	283	208	642	252	629	150	63	68	710x320x295
KTZ35.5	80	283	208	671	252	590	150	77	84	750x350x360
KTZ45.5	100	283	208	686	252	590	150	77	84	750x350x360
KTZ47.5	100	330	240	764	314	676	190	106	116	835x365x385
KTZ67.5	150	330	240	790	314	676	190	108	119	865x365x385
KTZ411	100	373	255	807	350	695	190	136	148	885x415x435
KTZ611	150	373	255	807	350	695	190	139	150	885x415x435
KTZ415	100	373	255	842	350	755	190	144	158	935x415x435
KTZ615	150	373	255	842	350	755	190	146	160	935x415x435

Performance curves

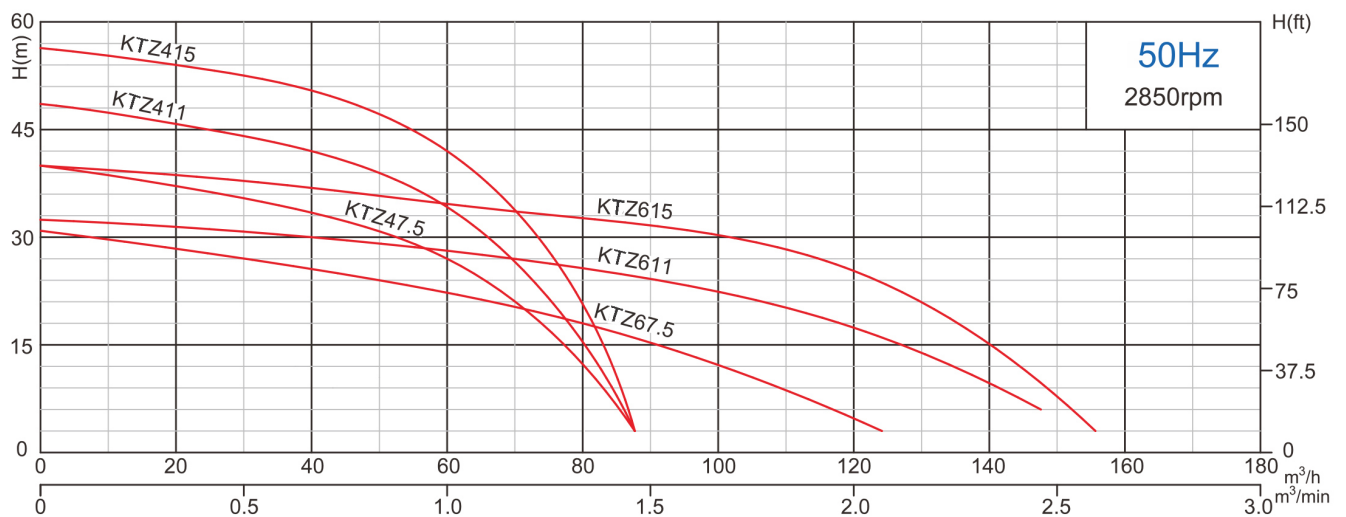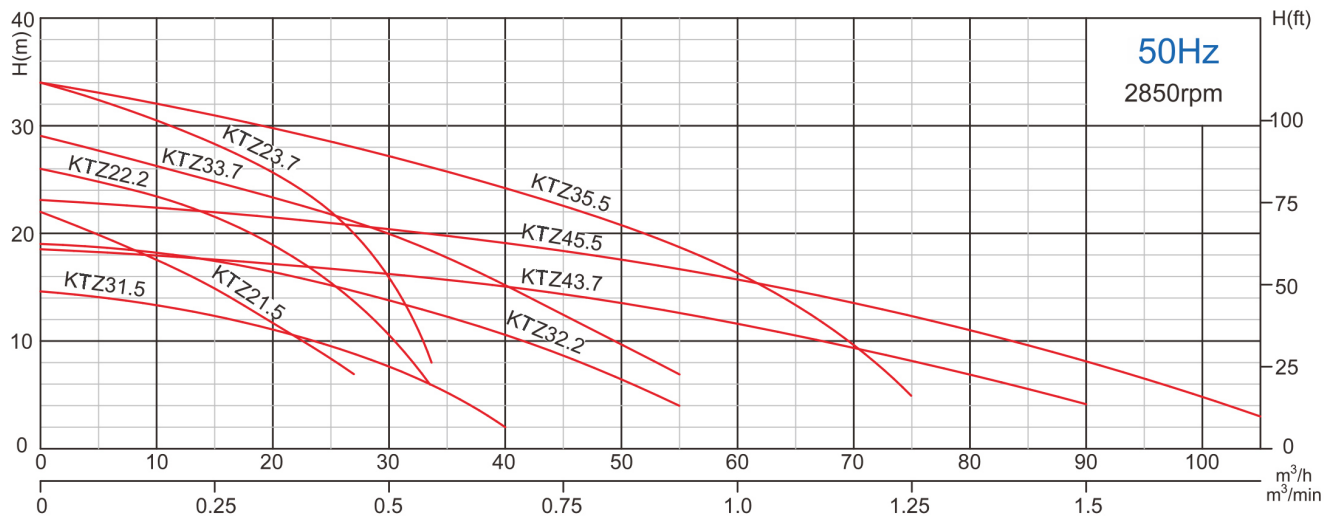

Performance table

Model (50Hz)	Outlet	Motor power		Rated current (400V)	Rated capacity		Rated head	Max capacity		Max Head	Impeller Passage
	mm	kW	HP	A	m³/h	m³/min	m	m³/h	m³/min	m	mm
KTZ21.5	50	1.5	2	3.5	15	0.25	15	27	0.45	22	8.5
KTZ31.5	80	1.5	2	3.5	30	0.50	8	40	0.67	14.5	8.5
KTZ22.2	50	2.2	3	5.0	18	0.30	20	33	0.55	26	8.5
KTZ32.2	80	2.2	3	5.0	36	0.60	11	55	0.92	19	8.5
KTZ23.7	50	3.7	5	7.7	12	0.20	30	33	0.55	34	8.5
KTZ33.7	80	3.7	5	7.7	30	0.50	20	55	0.92	29	8.5
KTZ43.7	100	3.7	5	7.7	60	1.0	11.5	90	1.50	18.5	8.5
KTZ35.5	80	5.5	7.5	11.4	36	0.60	25	75	1.25	34	8.5
KTZ45.5	100	5.5	7.5	11.4	60	1.0	16	105	1.75	23	8.5
KTZ47.5	100	7.5	10	15	48	0.80	30	84	1.40	40	11.5
KTZ67.5	150	7.5	10	15	90	1.60	15	124.8	2.08	31	19.5
KTZ411	100	11	15	22	60	1.0	35	84	1.40	48.5	11.5
KTZ611	150	11	15	22	102	1.70	22	147	2.45	32	19.5
KTZ415	100	15	20	29.5	60	1.0	42	84	1.40	56	11.5
KTZ615	150	15	20	29.5	102	1.70	30	156	2.60	40	19.5