


| Model        | Power HP | Voltage V | In/Outlet mm | H max m | Q max l/m | Demension (LxWxH) cm | Gross Weight kg |
|--------------|----------|-----------|--------------|---------|-----------|----------------------|-----------------|
| CDXM70/07    | 0.5      | 220       | 42-34        | 20      | 110       | 37x25x27             | 11              |
| CDX(M)90/10  | 1        | 220/380   | 42-34        | 30      | 150       | 37x24x27             | 12              |
| CDX(M)120/15 | 1.2      | 220/380   | 42-34        | 31      | 180       | 40x24x27             | 15              |
| CDX(M)120/20 | 2        | 220/380   | 42-34        | 38      | 200       | 46x27x30             | 15              |
| CDX(M)200/15 | 1.5      | 220/380   | 49-34        | 25      | 200       | 40x24x27             | 15              |
| CDX(M)200/20 | 2        | 220/380   | 49-34        | 32      | 225       | 40x25x27             | 16              |
| CDX(M)200/25 | 2.5      | 220/380   | 49-34        | 39      | 250       | 42x27x31             | 25              |

## USES AND INSTALLATIONS

The overcurrent componet is SUS304 material, Volute pump body adopts liquid bulging technology, compact and firm, Double impeller structure with high lift and high efficiency, Mechanical shaft seal, safe and reliable.

Apply to Circular cleaning system for industrial production lines in all fields, Home water system, booster unit, Agricultural and horticultural sprinkler irrigation, cooling tower.

## HYDRAULIC PERFORMANCE CURVES

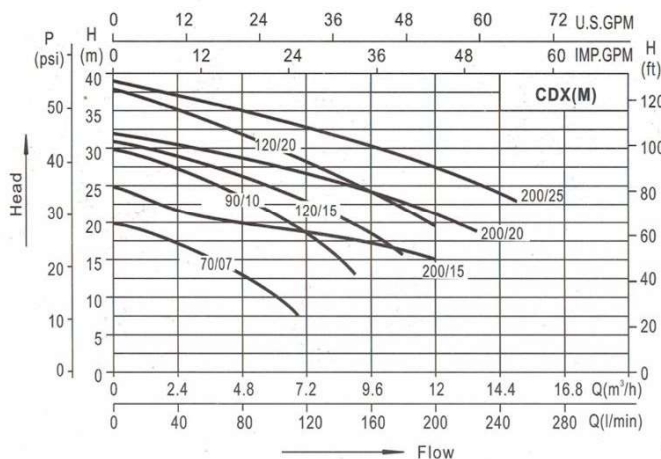

**CDX-M** Impeller: stainless




| Model         | Power<br>HP | Voltage<br>V | In/Outlet<br>mm | H max<br>m | Q max<br>l/m | Demension<br>(LxWxH)<br>cm | Gross<br>Weight<br>kg |
|---------------|-------------|--------------|-----------------|------------|--------------|----------------------------|-----------------------|
| 2CDXM70/10    | 1           | 220          | 42-34           | 42         | 150          | 40x24x26                   | 14                    |
| 2CDX(M)120/20 | 2           | 220/380      | 42-34           | 54         | 215          | 43x24x28                   | 20                    |
| 2CDX200/30    | 3           | 380          | 49-34           | 55         | 250          | 45x27x31                   | 25                    |
| 2CDX200/40    | 4           | 380          | 49-34           | 67         | 280          | 49x27x31                   | 27                    |
| 2CDX200/50    | 5           | 380          | 49-34           | 76         | 300          | 51x27x32                   | 35                    |

## USES AND INSTALLATIONS

The overcurrent componet is SUS304 material, Volute pump body adopts liquid bulging technology, compact and firm, Double impeller structure with high lift and high efficiency, Mechanical shaft seal, safe and reliable.

Apply to Circular cleaning system for industrial production lines in all fields, Home water system, booster unit, Agricultural and horticultural sprinkler irrigation, cooling tower.

## HYDRAULIC PERFORMANCE CURVES

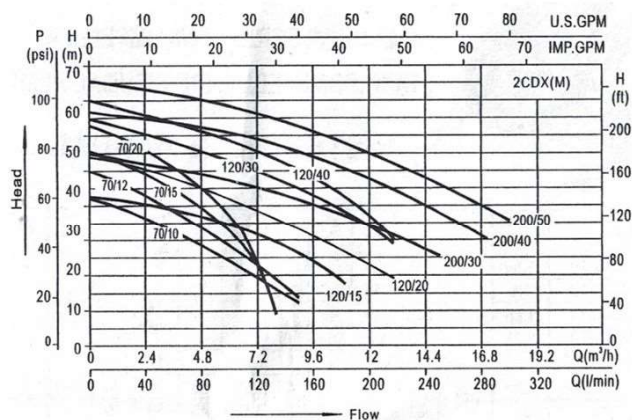

## 2CDX-M

Impeller: stainless

